


BUMPER HC.250

EPDM RUBBER

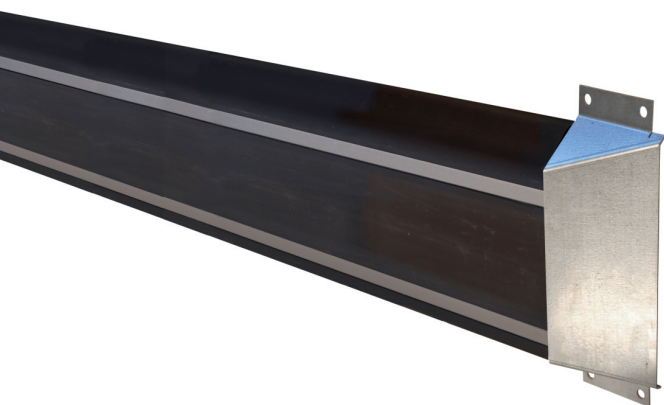

Heavy crashrail HC.250 with a rectangular section, realized in black alveolar elastometer (EPDM rubber) for high intensity impact.

Ideal for absorbing heavy shocks and protecting walls in the transit areas of trolleys, forklifts and vehicles.

STANDARD LENGHT AND FIXING

- Bumper lenght: 1,5 mt
- No installation on plasterboard walls.

A SINGLE PRODUCT and SEVERAL ACCESSORIES for DIFFERENT NEEDS :

PERFECT HOLD ON WALLS

Elastometer bumper directly fixed on the wall.


For every fixing point 2 not-in-sight overlayed dowels are required. Customized bushings are available for insertion in all holes to reinforce every anchor point.

TEAR-PROOF SOLUTION


Special slided tear-proof end caps, in galvanized steel, are placed to protect the bumper form any side impacts by vehicles that could hook the bumper and tear it off.

FOR A BETTER VISIBILITY


White reflective self-adhesive film strip, class 1, can be applied on its appropriate places, also ideal to cover the fixing holes.

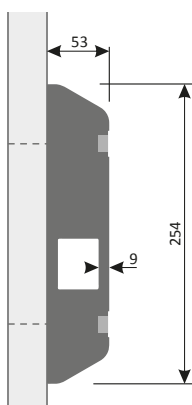


■ Ideal for high intensity impacts



■ Maximum visibility

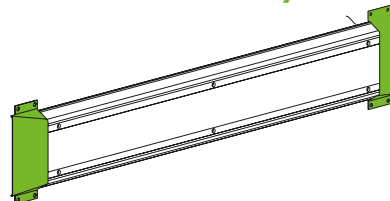

■ Great tear-proof resistance



■ Great tear-proof resistance and maximum visibility

