

HANDRAIL HS.34

STAINLESS STEEL



If the maximum resistance is needed, the HS.34 handrail with a 34 mm of diameter is the perfect choice because it is completely realized in satinated AISI 304 stainless steel.

It can also be installed on double-plate plasterboard wall.

This product is supplied cut to size.

SMOOTH FINISH

Refined handrail with a satinated and smooth finish to guarantee a better hygiene and cleanliness.

CONTINUOUS PROFILE



Many accessories available to offer a sturdy and continuous supporting bar, in AISI 304 stainless steel, to guarantee the highest security and sustain in your hallways.

BOTTOM CLOSURE

The horizontal handrail bar is free from the bottom closure profile to guarantee a secure handle and a better surface cleaning.

STANDARD LENGHT AND FIXING

- Maximum bar lenght: 6 mt
- Maximum wheelbase between brackets: 950 mm
- A reinforcement in plasterboard wall is recommended.

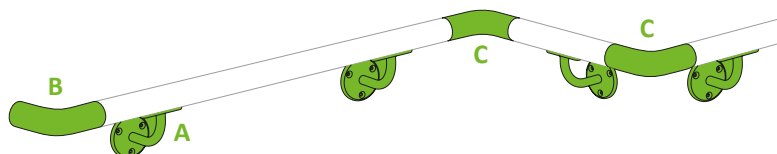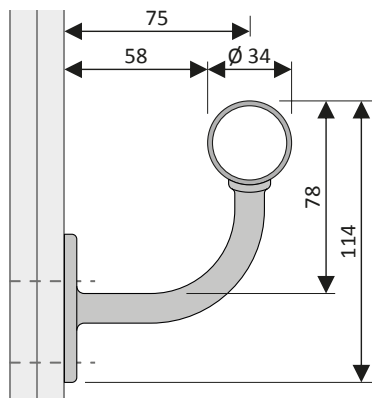

GREAT RESISTANCE

- A** Stainless steel (AISI 304) brackets, with satin finish and 3 anchor screws.
- B** Curved end caps in stainless steel (AISI 304) with a satin finish.

CONTINUOUS HANDRAIL

- C** Curved end caps in satinated stainless steel (AISI 304).
- D** External and internal satinated stainless steel angles.



Stainless steel AISI 304 with satin finish.

